


### Glazing Bar Holdfasts

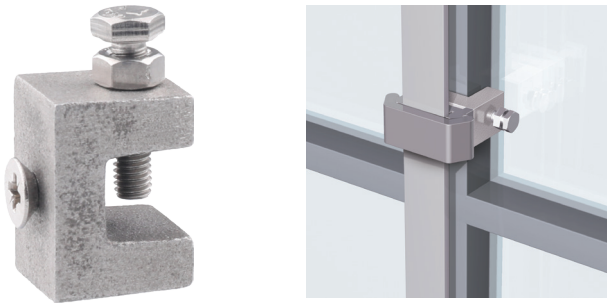

**Glazing Bar holdfast** is used to fix clips to glazing bars. Can be used with both metallic and non-metallic clips.

CONDUCTOR TYPE	MATERIAL	WEIGHT (kg)	PART NO.
Aluminium	Aluminium	0.04	AGBH
Copper	Copper	0.11	GGBH

**Material:** Gunmetal/Aluminium

**APPLICATION**

**COMPONENT ASSEMBLY:** Glazing Bar Holdfast + All Kingsmill DC clips = [Image of assembly]

### Back Plate Holdfasts



**Back Plate holdfast** maintains a set distance of 75mm between lightning conductor and the surface of the structure being protected (when required).

Supplied with M6 CSK screw for attaching either Tape Clip or Square Clamp.

CONDUCTOR TYPE	MATERIAL	WEIGHT (kg)	PART NO.
Aluminium	Aluminium	0.84	ABPH
Copper	Copper	0.26	BBPH

**Material:** Copper Alloy/Aluminium

**FIXINGS**  
 2 x CSK 1½ x No.10 woodscrew (BCSW1.5-10 brass for copper/A2CSKSLT1.5-10 stainless steel for aluminium) + plug (PP10) not included **SEE PAGE FIT:20**

**APPLICATION**

**COMPONENT ASSEMBLY:** Back Plate Holdfast + Non-metallic DC clips = [Image of assembly]

**APPLICATION**

**COMPONENT ASSEMBLY:** Back Plate Holdfast + Metallic DC clips = [Image of assembly]

**APPLICATION**

**COMPONENT ASSEMBLY:** Back Plate Holdfast + Square clamps = [Image of assembly]

*Clip/Clamps NOT included - must be ordered separately.*