


## Insulated Lightning Conductor Cable Holder with Connector



The **Insulated Lightning Conductor Cable Holder with Connector** is supplied with either M8 or M16 threaded inserts.

DESCRIPTION	HEIGHT (A) (mm)	THREADED INSERT (B)	WEIGHT (kg)	PART NO.
Cable Holder with M8 internal thread	70	M8	0.16	KM30400101
Cable Holder with M16 internal thread	94	M16	0.20	KM30400201

**Material:** Galvanised Steel Insulated Saddle

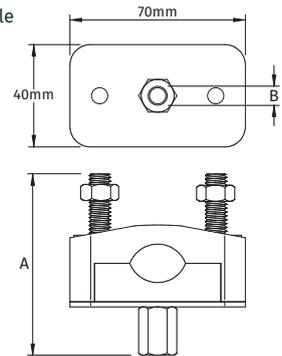


## Universal Seam Holder



The **Universal Seam Holder** is used for fixing Cable Holders to standing seam roofs.

MATERIAL	BOLTS	WEIGHT (kg)	PART NO.
Galvanised Steel	3 x M8 x 25mm	0.18	KM99600101
Hot Dip Galvanised	3 x M8 x 25mm	0.19	KM99600102
Stainless Steel	3 x M8 x 25mm	0.17	KM99600105

**Material:** Galvanised Steel, Hot Dip Galvanised or Stainless Steel

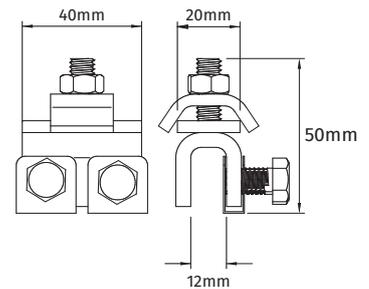

### APPLICATION

#### COMPONENT ASSEMBLY:



The **Universal Seam Holder** is designed for Cable Holders with an M8 threaded insert (two M10 versions are also available).