

CLEAN ENERGY



Solar Panels

450W PHOTOVOLTAIC SOLAR PANEL	CE: 2-4
560W PHOTOVOLTAIC SOLAR PANEL	CE: 5-7
670W PHOTOVOLTAIC SOLAR PANEL	CE: 8-10

Power Inverters

Off Grid Inverter	CE: 11-17
-------------------	------------------

Energy Storage

Solar Tubular Batteries	CE: 15-17
Growatt Hope 4.8L- C1 Lithium Battery	CE: 18-20
Growatt Hope 4.8L- C1 KIT	CE: 21


Clean Energy Accessories

MC4 Connector	CE: 22
---------------	---------------





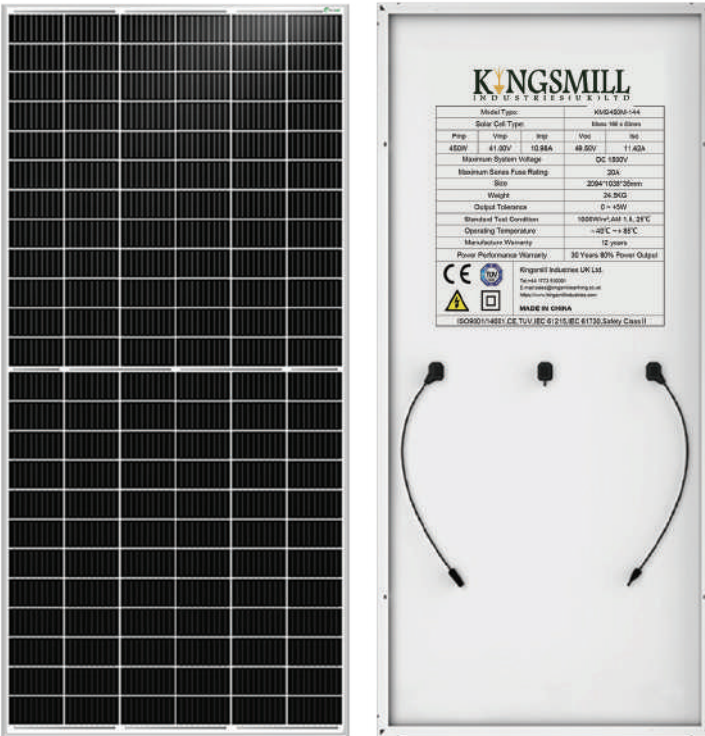

Introduction


KMS450M-144 Photovoltaic Solar Panels are certified for the most challenging environmental conditions. This KMS450M-144. Photovoltaic high-power monocrystalline solar panel operates at 20.70% efficiency to maximize the light absorption area.

Product Options



Mono Solar Panel Features

-  Widely using of the most popular and mature type of modules for solar system
-  High power output and highest conversion efficiency of 20.70%
-  Anti-reflective and anti-soiling surface reduces power loss from dirt and dust
-  Outstanding Performance in low-light irradiance environments
-  Excellent mechanical load resistance: Certified to withstand high wind loads (2400Pa) and Snow loads (5400Pa)
-  Positive power tolerance: 0~+5W

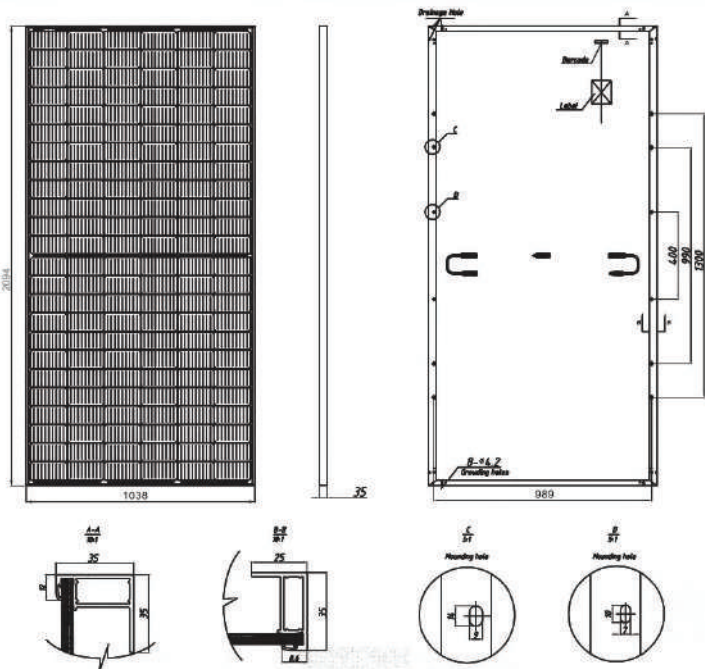


Electrical Characteristics(STC)	
Module Type	KMS450M-144
Maximum Power (Pmax)	450W
Maximum Power Voltage (Vmp)	41V
Maximum Power Current (Imp)	10.98
Open-circuit Voltage (Voc)	49.50
Short-circuit Current (Isc)	11.42
Module Efficiency (%)	20.70
Power Tolerance	0~+5W
Temperature Coefficient of Isc	+0.05%/°C
Temperature Coefficient of Voc	-0.29%/°C
Temperature Coefficient of Pmax	-0.37%/°C

Product Features

Warranty	
12 years for product defects in materials & workmanship	
12 years for 90% of warranted minimum power output	
30 years for 80% of warranted minimum power output	
30 years liner warranty	



Reliable Quality	
Positive power tolerance: 0~+5W	
100% EL Double-inspection ensures modules are defects free	
Modules Binned by Current to improve system performance	
Potential induced Degradation (PID) Resistant	

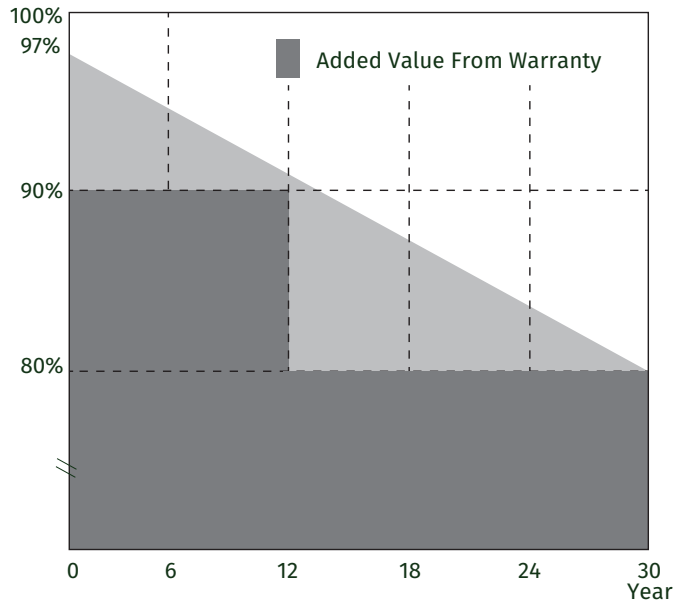

Mechanical Parameters	
Cell(mm)	9BB Mono 166*83
Weight(kg)	24.5kg
Glass Thickness	3.2mm,Low Iron Tempered Glass
Dimensions (L*W*H)(mm)	2094*1038*35mm
Cable Cross Section Size (mm ²)	4
Cable Cross Section Length (mm)	300
No.of Cells and Connections	144(6*24)
Junction Box	IP67/68,3 Diodes
Connector	MC4 Compatiple

Working Conditions	
Maximum System Voltage	DC 1500V
Operating Temperature	-40°C~ +85°C
Maximum Series Fuse	20A
Maximum Static Load,Front (e.g.,snow and wind)	5400Pa (112 lb/ft ²)
Maximum Static Load,Back (e.g.,wind)	2400Pa (50 lb/ft ²)
NOCT	44±2°C
Positive power tolerance	0~ +5W
Application Class	Class A

I-V Curve

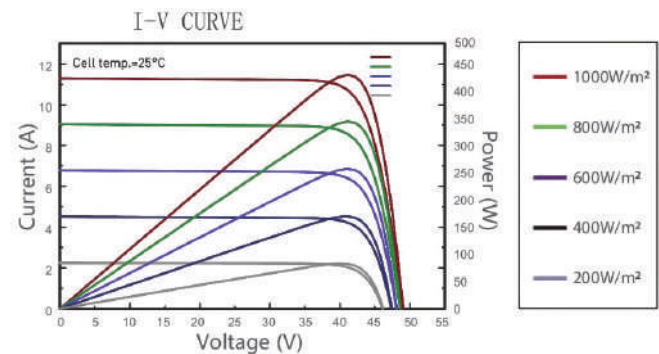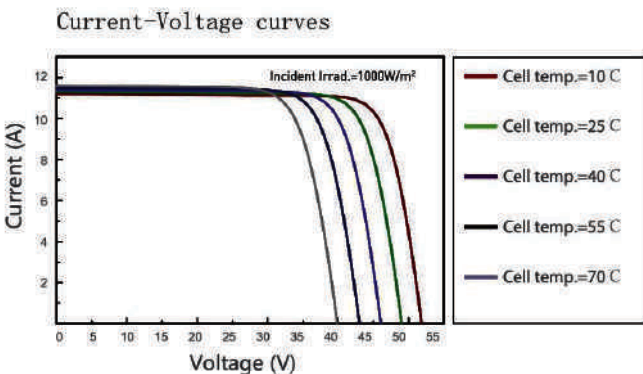

Product Features

GLASS

- Antireflective glass
- Translucency of normal luminance is increased by 2%
- Module efficiency is increased by 2%
- Self-cleaning option
- Service life as long as 25 years (30 years optional)



SOLAR CELL

- High efficiency PV cells
- Appearance consistency
- Color sorting ensure consistent appearance on each module
- Anti-PID



FRAME

- Conventional frame
- Boost bearing capability and prolong service life
- Serrated-clip design tensile strength
- Seal-lip design glue injection



JUNCTION BOX

- Conventional standalone edition and engineering custom edition
- Quality diode ensures module running safety
- IP67 protection level
- Heat dissipation
- Long service life



More Information


All with A Grade for on-grid & off-grid use for residential and public rooftop and ground mounting
Solar panels are a clean source of energy that use the sun's rays to convert them into electricity or heat.

Our clean energy solutions provide electrical power as a way to decarbonize
and transition to clean energy in our mission to combat climate change.







Introduction

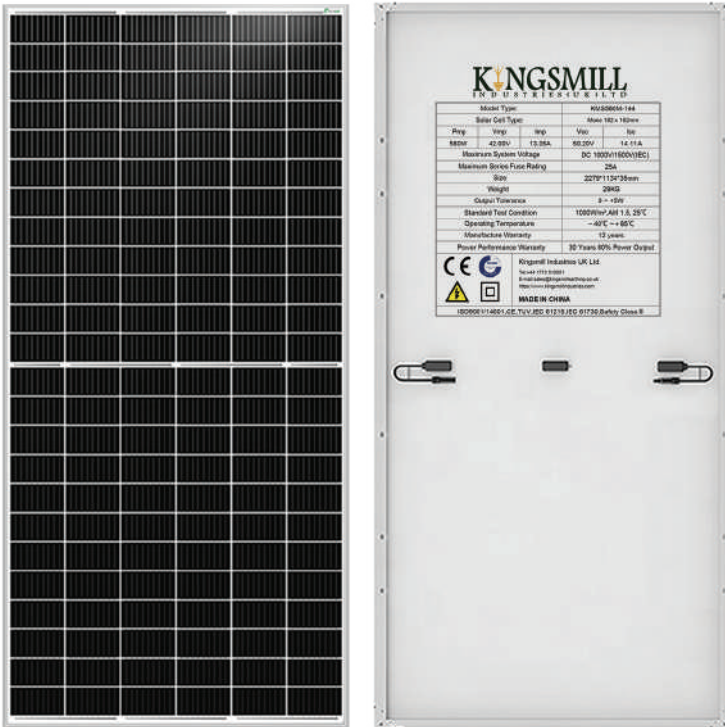
KMS560M-144 Photovoltaic Solar Panels are certified for the most challenging environmental conditions. This KMS560M-144. Photovoltaic high-power monocrystalline solar panel operates at 21.90% efficiency to maximize the light absorption area.

Product Options



Mono Solar Panel Features

-  Widely using of the most popular and mature type of modules for solar system
-  High power output and highest conversion efficiency of 21.90%
-  Anti-reflective and anti-soiling surface reduces power loss from dirt and dust
-  Outstanding Performance in low-light irradiance environments
-  Excellent mechanical load resistance: Certified to withstand high wind loads (2400Pa) and Snow loads (5400Pa)
-  Positive power tolerance: 0~+5W

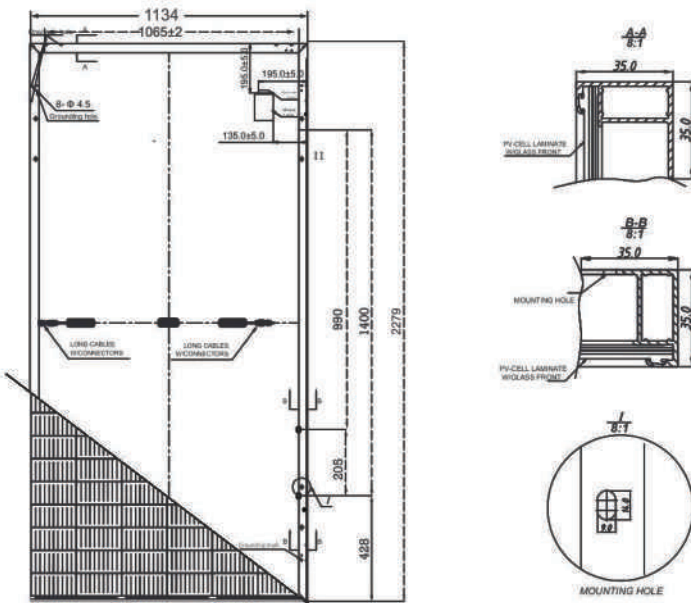


Electrical Characteristics(STC)	
Module Type	KMS560M-144
Maximum Power (Pmax)	560W
Maximum Power Voltage (Vmp)	42.00
Maximum Power Current (Imp)	13.35
Open-circuit Voltage (Voc)	50.20
Short-circuit Current (Isc)	14.11
Module Efficiency (%)	21.90%
Power Tolerance	0~+5W
Temperature Coefficient of Isc	+0.043%/°C
Temperature Coefficient of Voc	-0.26%/°C
Temperature Coefficient of Pmax	-0.36%/°C

Product Features

Warranty
12 years for product defects in materials & workmanship
12 years for 90% of warranted minimum power output
30 years for 80% of warranted minimum power output
30 years liner warranty



Reliable Quality
Positive power tolerance: 0~+5W
100% EL Double-inspection ensures modules are defects free
Modules Binned by Current to improve system performance
Potential induced Degradation (PID) Resistant

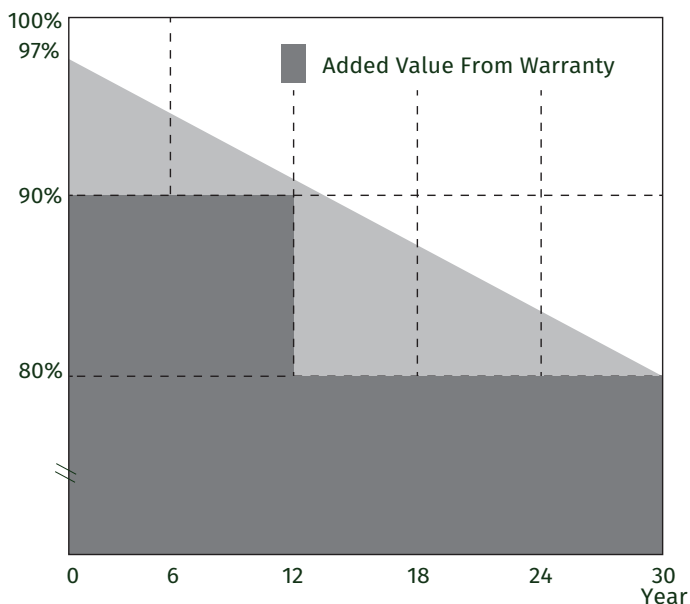

Mechanical Parameters	
Cell(mm)	Mono 182*182mm
Weight(kg)	29kg
Glass Thickness	3.2mm,AR Coating Tempered Glass
Dimensions (L*W*H)(mm)	2279*1134*35mm
Cable Cross Section Size (mm ²)	4
Cable Cross Section Length (mm)	300
No.of Cells and Connections	144(6*24)
Junction Box	IP67,with Bypass Diodes
Connector	MC4 Compatiple

Working Conditions	
Maximum System Voltage	DC 1000V/1500V(IEC)
Operating Temperature	-40°C~ +85°C
Maximum Series Fuse	25A
Maximum Static Load,Front (e.g.,snow and wind)	5400Pa (112 lb/ft ²)
Maximum Static Load,Back (e.g.,wind)	2400Pa (50 lb/ft ²)
NOCT	45±2°C
Positive power tolerance	0~ +5W
Application Class	Class A


I-V Curve

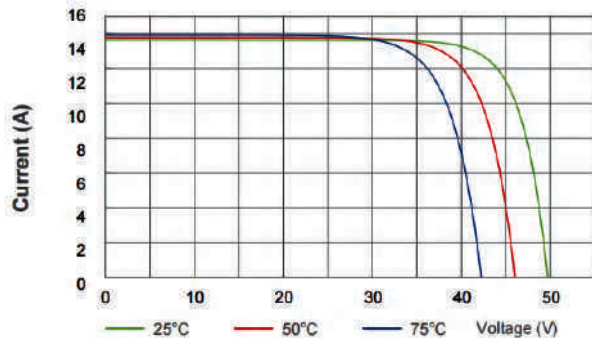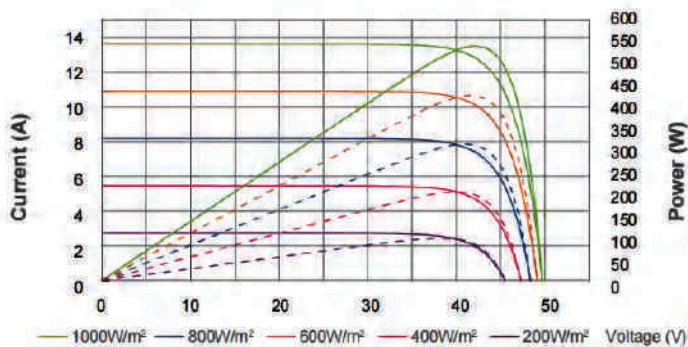

Product Features


GLASS

- Antireflective glass
- Self-cleaning function
- Module efficiency is increased by 2%
- Service life as long as 25 years (30 years optional)
- Translucency of normal luminance is increased by 2%

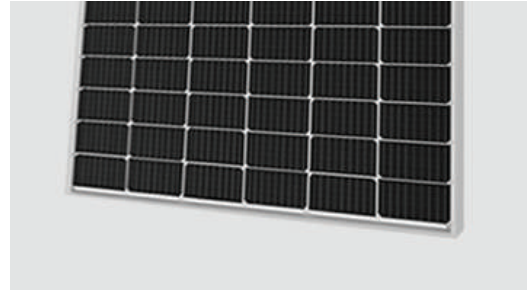

SOLAR CELL

- Uniform color
- High PID resistant
- Low breakage rate
- High stunt-resistance
- High model efficiency up to 20%

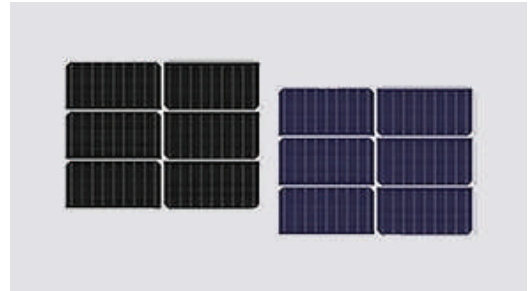

FRAME

- Conventinal frame
- Seal-lip design glue injection
- Serrated-clip design tensile strength
- Boost bearing capability and prolong service life



JUNCTION BOX

- Heat dissipation
- Long service life
- >IP67 protection level
- Innovative Full-Glue-Filled
- Waterproofness Junction Box



More Information


All with A Grade for on-grid & off-grid use for residential and public rooftop and ground mounting
Solar panels are a clean source of energy that use the sun's rays to convert them into electricity or heat.

Our clean energy solutions provide electrical power as a way to decarbonize
and transition to clean energy in our mission to combat climate change.





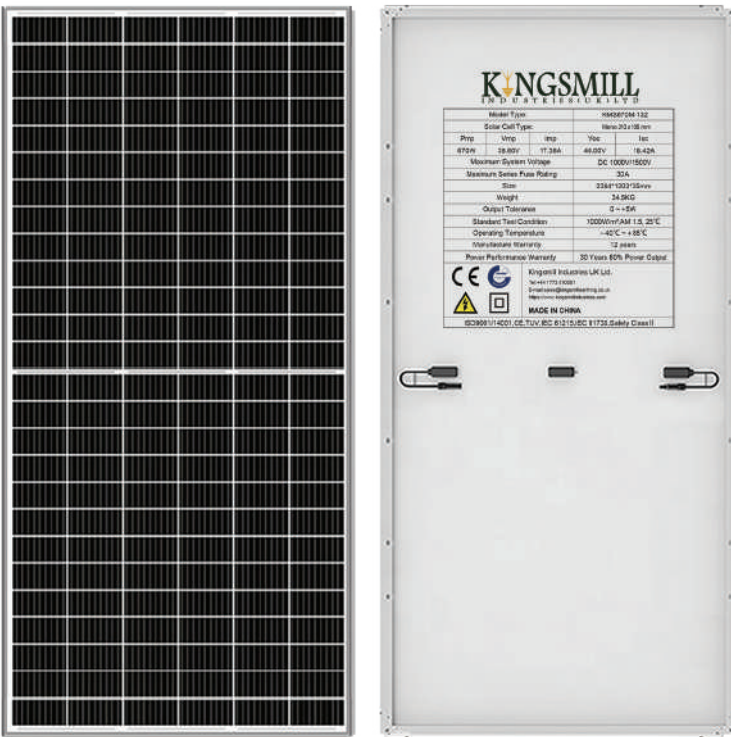

Introduction


KMS670M-132 Photovoltaic Solar Panels are certified for the most challenging environmental conditions. This KMS670M-132. Photovoltaic high-power monocrystalline solar panel operates at 21.60% efficiency to maximize the light absorption area.

Product Options



Mono Solar Panel Features

-  Widely using of the most popular and mature type of modules for solar system
-  High power output and highest conversion efficiency of 21.60%
-  Anti-reflective and anti-soiling surface reduces power loss from dirt and dust
-  Outstanding Performance in low-light irradiance environments
-  Excellent mechanical load resistance: Certified to withstand high wind loads (2400Pa) and Snow loads (5400Pa)
-  Positive power tolerance: 0~+5W

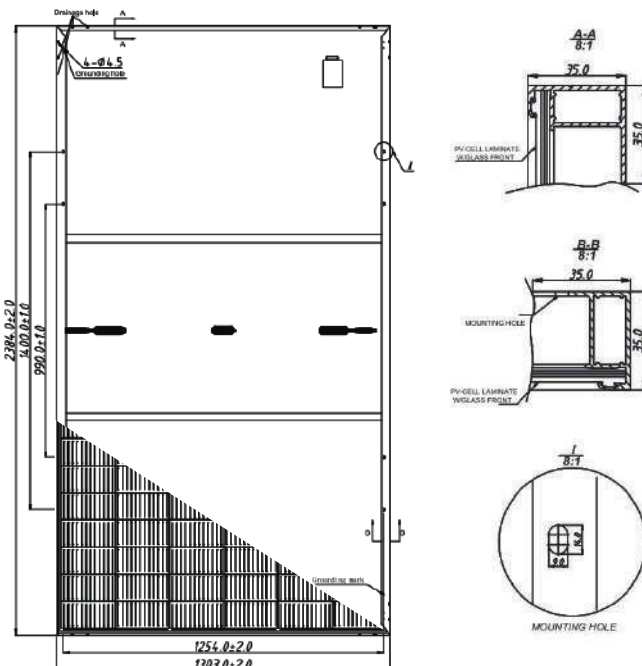


Electrical Characteristics(STC)	
Module Type	KMS670M-132
Maximum Power (Pmax)	670W
Maximum Power Voltage (Vmp)	38.60
Maximum Power Current (Imp)	17.36
Open-circuit Voltage (Voc)	46.00
Short-circuit Current (Isc)	18.42
Module Efficiency (%)	21.60%
Power Tolerance	0~+5W
Temperature Coefficient of Isc	+0.043%/°C
Temperature Coefficient of Voc	-0.26%/°C
Temperature Coefficient of Pmax	-0.36%/°C

Product Features

Warranty
12 years for product defects in materials & workmanship
12 years for 90% of warranted minimum power output
30 years for 80% of warranted minimum power output
30 years liner warranty



Reliable Quality
Positive power tolerance: 0~+5W
100% EL Double-inspection ensures modules are defects free
Modules Binned by Current to improve system performance
Potential induced Degradation (PID) Resistant

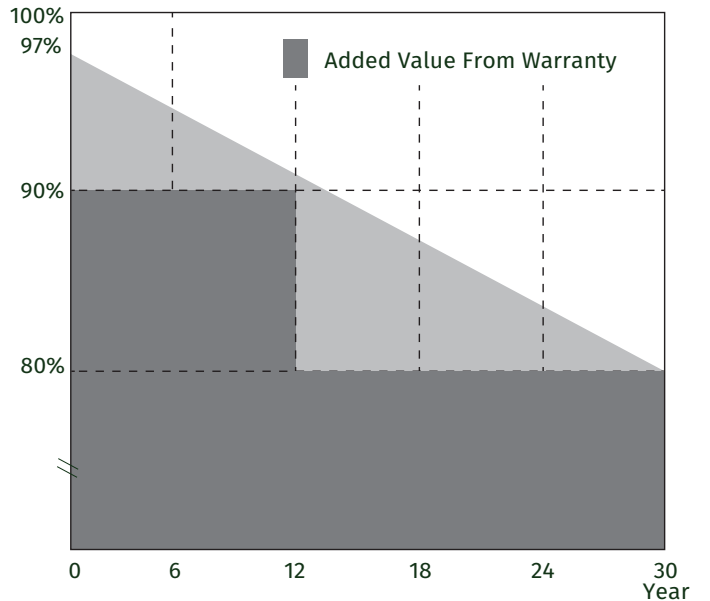

Mechanical Parameters	
Cell(mm)	Mono 210*105mm
Weight(kg)	34.5kg
Glass Thickness	3.2mm High transparency solar glass
Dimensions (L*W*H)(mm)	2384*1303*35mm
Cable Cross Section Size (mm ²)	4
Cable Cross Section Length (mm)	300
No.of Cells and Connections	132(6*22)
Junction Box	IP68 Rated
Connector	MC4 Compatiple

Working Conditions	
Maximum System Voltage	DC 1000V/1500V
Operating Temperature	-40°C~ +85°C
Maximum Series Fuse	30A
Maximum Static Load,Front (e.g.,snow and wind)	5400Pa (112 lb/ft ²)
Maximum Static Load,Back (e.g.,wind)	2400Pa (50 lb/ft ²)
NOCT	45±2°C
Positive power tolerance	0~ +5W
Application Class	Class A


I-V Curve

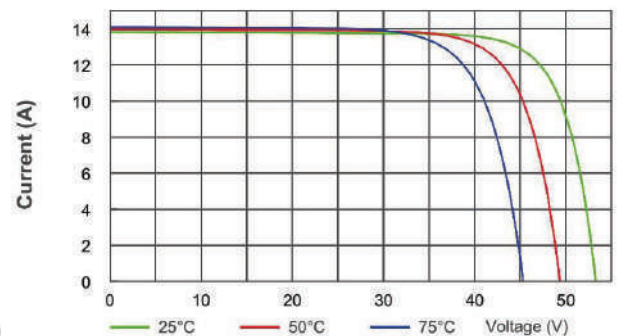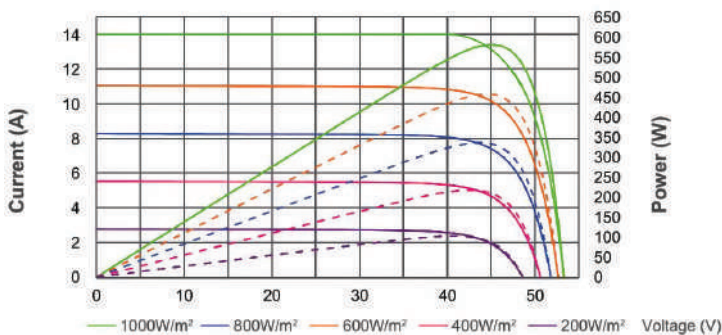

Product Features


MULTI BUSBAR TECHNOLOGY

- Improves efficiency of modules
- Offers better appearance

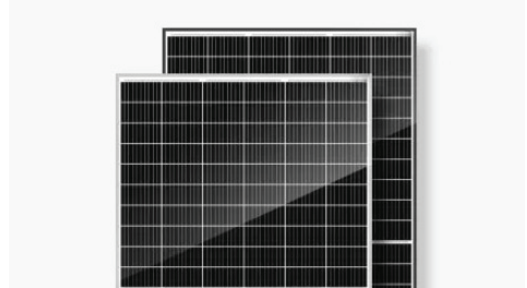


HALF CUT TECHNOLOGY

- Under the same shadow condition
- Lower power loss than full cell

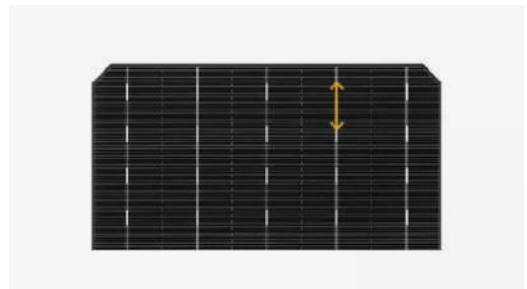

FRAME

- Conventional frame
- Boost bearing capability
- Prolong service life
- Serrated-clip design tensile strength

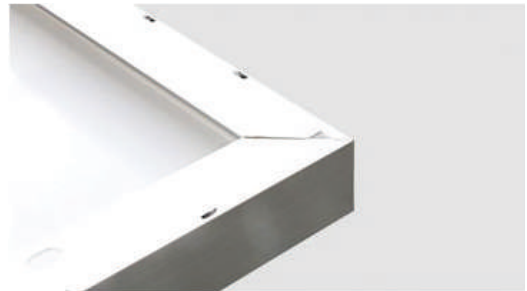

SPLIT JUNCTION BOX

- Reduced internal power loss
- Ensures model running safety



More Information

All with A Grade for on-grid & off-grid use for residential and public rooftop and ground mounting
Solar panels are a clean source of energy that use the sun's rays to convert them into electricity or heat.

Our clean energy solutions provide electrical power as a way to decarbonize
and transition to clean energy in our mission to combat climate change.

Introduction

Growatt SPF 3500-5000 ES is a 230VAC output voltage off-grid inverter for back up power and self-consumption application, with a maximum PV input voltage up to 450VDC. It can also work without battery to saving system investment cost.

Product Options



Datasheet	KMSPF 3500 ES	KMSPF 5000 ES
Battery Voltage	48VDC	
Battery Type	Lithium/Lead-acid	

INVERTER OUTPUT	KMSPF 3500 ES	KMSPF 5000 ES
Rated Power	3500VA/ 3500W	5000VA/ 5000W
Parallel Capability	Yes, 6 units maximum	
AC Voltage Regulation (Battery Mode)	23DVAC \pm 5% @50/6DHz	
Surge Power	7000VA	10000VA
Efficiency (Peak)	93%	
Waveform	Pure sine wave	
Transfer Time	10ms typical 20ms Max	

SOLAR CHARGER	KMSPF 3500 ES	KMSPF 5000 ES
Maximum PV Array Power	4500W	6000W
MPPT Range @ Operating Voltage	120VDC - 430VDC	
Number of Independent MPP Trackers / Strings Per MPP Tracker	1/1	
Maximum PV Array Open Circuit Voltage	450VDC	
Maximum Solar Charge Current	80A	100A

AC CHARGER	KMSPF 3500 ES	KMSPF 5000 ES
Charge Current	60A	80A
AC Input Voltage	230 VAC	
Selectable Voltage Range	170-280 VAC (For Personal Computers) : 90-280 VAC (For Home Appliances)	
Frequency Range	50Hz/60Hz (Auto Sensing)	

PHYSICAL	KMSPF 3500 ES	KMSPF 5000 ES
Protection Degree	IP20	
Dimension(W/H/D)	330/485/135mm	330/485/135mm
Net Weight	11.5kgs	12kgs

OPERATING ENVIRONMENT	KMSPF 3500 ES	KMSPF 5000 ES
Humidity	5% to 95% Relative Humidity (Non-condensing)	
Attitude	<2000m	
Operating Temperature	0°C - 55°C	
Storage Temperature	-15°C - 60°C	

Product Features

- Integrated MPPT charge controller.
- Equalization charging function.
- Work with battery or without battery.
- Maximum PV input voltage up to 450VDC.
- Configurable grid or solar input priority.
- Optional WIFI/ GPRS remote monitoring.
- Support parallel operation for capacity expansion up to 30kW.
- PV and Grid power the load jointly if PV energy insufficient.
- Flexibly schedule the Inverter charging and discharging time.

More Information

Solar panels are a clean source of energy that use the sun's rays to convert them into electricity or heat.

Our clean energy solutions provide electrical power as a way to decarbonize and transition to clean energy in our mission to combat climate change.

Introduction

Growatt SPF 3000TL LVM series inverter has a pure sine wave output inverter also just for 120VAC power supply system. It is perfect for off-grid, backup power and self-consumption applications.

It is a multifunctional off grid solar inverter, integrated with a MPPT solar charge controller, a high frequency pure sine wave inverter and a UPS function module in one machine, which is perfect for off grid backup power and self-consumption applications. The transformerless design provides reliable power conversion in compact size.

Product Options



Datasheet	SPF 3000TL LVM-24P	SPF 3000TL LVM-48P
Battery Voltage	24VDC	48VDC

INVERTER OUTPUT	SPF 3000TL LVM-24P	SPF 3000TL LVM-48P
Rated Power	3000VA/ 3000W	3000VA/ 3000W
Parallel Capability	Yes	
AC Voltage Regulation (Battery Mode)	120VAC \pm 5% @ 50/60Hz	120VAC \pm 5% @ 50/60Hz
Surge Power	6000VA	6000VA
Efficiency (Peak)	93%	
Waveform	Pure sine wave	
Transfer Time	10 ms (For Personal Computers); 20 ms (For Home Appliances)	

SOLAR CHARGER	SPF 3000TL LVM-24P	SPF 3000TL LVM-48P
Maximum PV Array Power	2000W	4500W
MPPT Range @ Operating Voltage	30VDC ~ 115VDC	60VDC ~ 115VDC
Maximum PV Array Open Circuit Voltage	145VDC	145VDC
Maximum Solar Charge Current	80A	80A
Maximum Efficiency	98%	98%
Standby Power Consumption	2W	2W

AC CHARGER	SPF 3000TL LVM-24P	SPF 3000TL LVM-48P
Charge Current	60A	40A
AC Input Voltage	120 VAC	120 VAC
Selectable Voltage Range	95-140 VAC (For Personal Computers) ; 65-140 VAC (For Home Appliances)	
Frequency Range	50Hz/60Hz (Auto Sensing)	

PHYSICAL	SPF 3000TL LVM-24P	SPF 3000TL LVM-48P
Dimension(W/H/D)	130/350/455mm	
Net Weight	11.5kgs	

OPERATING ENVIRONMENT	SPF 3000TL LVM-24P	SPF 3000TL LVM-48P
Humidity	5% to 95% Relative Humidity (Non-condensing)	
Operating Temperature	0°C - 55°C	
Storage Temperature	-15°C - 60°C	

Product Features

- Integrated MPPT charge controller.
- Configurable grid or solar input priority.
- Optional WIFI/ GPRS remote monitoring.
- Parallel for scalability

More Information

Solar panels are a clean source of energy that use the sun's rays to convert them into electricity or heat. Our clean energy solutions provide electrical power as a way to decarbonize and transition to clean energy in our mission to combat climate change.

For more information regarding battery installation please download our pdf [HERE](#).

Introduction

These lead tubular batteries use premium technology and high grade materials to deliver maximum power for extended durations and have an appreciably longer life span. These batteries are specifically suitable for powering up UPS and inverters. These flooded lead acid batteries are environment-friendly, highly reliable in performance and are low in cost. Hear again our extensive research and development wing has helped us create batteries customized to suit Indian operating conditions. These flooded batteries are perfect for use in battery powered vehicles and to power inverters as well as for telecom use.

Product Options



Model	Capacity at 27 deg C when discharged at (C20 upto 1.75 Vpc 1.280)	Dimension (±3mm)			Weight (KG±5%)	
		Length	Width	Height	Dry	Filled
KMASTB16500	150 AH	505	190	410	29	56
KMASTB22000	200 AH	505	190	410	29	61
KMASTB26000	240 AH	505	190	410	34	68

*The height mentioned is upto terminal top

Model	Initial Charge Minimum AH Input (AH)	Initial Charge At Constant Current (A)		Constant Potential Limiting Current (Amps)	Triple Charge Current in (mA)	
		Start (Upto 2.3Vpc)	Finish (Upto 2.75Vpc)		Min.	Max.
KMASTB16500	15	7.5	525	25	130	520
KMASTB22000	20	9	630	30	155	625
KMASTB26000	24	11	770	36.6	190	765

Initial charging instruction for dry charge battery

- 1: Filling in specific 1.220± 0.005 at 27 deg C
- 2: Rest Period 12 hrs
- 3: In order to reduce the charging time, the following route may be adopted
 - For ASTB 22000 The initial 2.36Vpc charging current may be 20A upto followed by 9A upto 2.75Vpc
 - For ASTB 26000 The initial 2.36Vpc charging current may be 24A upto followed by 11A upto 2.75Vpc

Condition of Fully Charged

- 3 Consecutive hourly reading of specific gravity and voltage become constant
- Top of charge voltage will be around 16.2V - 16.5V
- All Cells should be gas freely
- Minimum Ah has been given
- Specific Gravity at fully Charged condition 1.240 ± 0.005 at 27 Deg C

Product Features



Long Shelf Life when left unattended for extended periods



Acid Resistant Polyester Gauntlets



Pasted Negative Plates



High Porosity Envelope Separators



Tubular Positive Plates



Micro Porous Ceramic Vent Plug

Product Benefits



Long Design Life



Rugged Performance



Very Low Maintenance



Longer Life Without Charging



Can Handle Extreme Weather Conditions




More Efficient and Save Money

Battery Cyclic Performance

Calculation & Estimation
IDEAL CYCLIC PERFORMANCE

Graph 1, Cycle life vs. DOD of KINGSMILL SOLAR TUBULAR BATTERY with Ideal Charge Table 1, data of cycle number

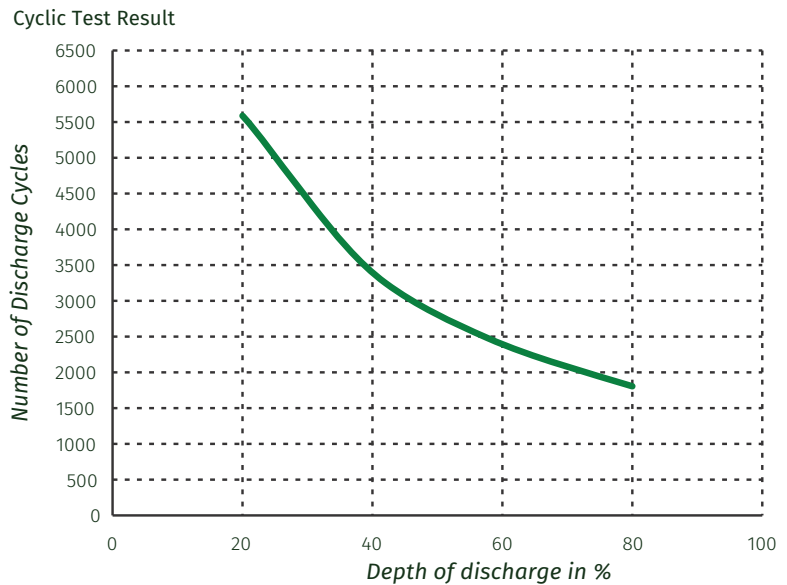

Discharge & Charge Scenario (80%DOD)

CYCLE METHOD

Discharge with $2I_{10}$ for 4 hours (80% DOD), charge with $2I_{10}$ for 3.5 hour + I_{10} for 0.5 hour + $0.25I$ for 3.5 hour. This is one cycle

RESIDUE CAPACITY DETERMINATION

The batteries are discharged at 10 hour rate after every 50 cycles to test battery capacity. When residue capacity of 10-hour rate capacity is lower than 80%, test is ended. After discharge at 10-hour rate after every 50 cycles, the charge method is: charge 80% of discharged capacity with current of $2I_{10}$ + charge 20% with 10 current of I_{10} + charge 20% with current of $0.4I_{10}$ (i.e. charge 120% of discharged capacity)

TEMPERATURE - 27 C

Advantage of Upper Constant Current Charge Model Battery; can be completely recharged within 8 hours. The end charge voltage will be higher than 2.6Vpc, which is good for active material exchange.

Disadvantage of Upper Constant Current Charge Model

It has risk of battery malfunction without voltage limited. It is not easy to manage charging in practice.

** Technical Parameters are Subject to Change due to Continuous improvements and R&D*

More Information


Solar panels are a clean source of energy that use the sun's rays to convert them into electricity or heat.

Our clean energy solutions provide electrical power as a way to decarbonize and transition to clean energy in our mission to combat climate change.

Introduction

Growatt Hope 4.8L-C1 Lithium Battery is an energy storage unit composed of cells, mechanical parts, battery management system (BMS) as well as power and signal terminals.

Product Options

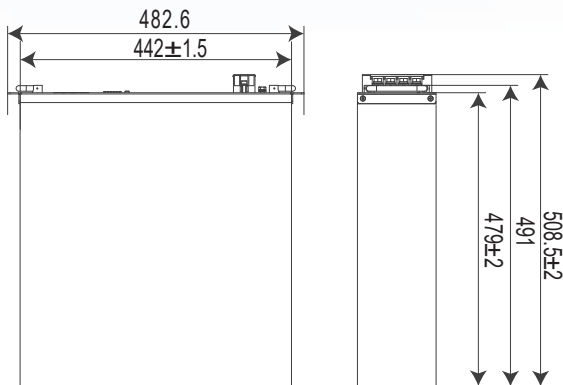

Datasheet	Hope 4.8L-C1
Battery Data	
Nominal Voltage	48V
Normal Capacity	4.8kWh
Usable Capacity	4.46kWh
Operating Voltage	42 ~ 54V
Rated Charging Current	50A
Rated Discharging Current	100A
Max. Discharging Power	4.5kW
Peak Discharging Power	6.1kW/6s
Max Charging Power	4.5KW
General Data	
Dimension (W/D/H)	442/130/480mm
Weight	45Kg
IP Protection	IP20
Working Temperature	-10°C~+55°C
Storage Temperature	-20°C~+45°C
Features	
DOD	93%
Parallel Connection	Max.16packs
Communication Port	CAN/RS485
Warranty	5 Years
IEC62619 , CE , UN38.3	

Product Features

- Compact size and easy installation
- High energy density and efficiency
- Excellent safety of LiFePO4 battery
- DoD up to 93%

Certifications

- ISO9001/14001
- CE
- TUV

More Information

Solar panels are a clean source of energy that use the sun's rays to convert them into electricity or heat. Our clean energy solutions provide electrical power as a way to decarbonize and transition to clean energy in our mission to combat climate change.

How to Install

Installation Of Battery

It is recommended to install the battery into a cabinet and place it indoor.

If you install it outdoor, select a cabinet with a sufficient IP rating. Build sunshade & rain shelter to avoid direct exposure to sunlight and rain for outdoor application


CAUTION

- Do NOT expose battery into sunshine or rain directly.
- Keep the dirt or dust at a minimal level.
- Do not install battery in a place where flood frequently occurs.
- Do not install battery in highly humid area.
- Ensure direct contact between battery shell and ambient air and do NOT cover or shield battery.

1 - Battery Orientation

The battery supports stackable installation with brackets. At most 8 batteries can be athwart stacked.

Ensure that you install the battery in correct directions. Please refer to figures below (✓ means acceptable and X unacceptable).

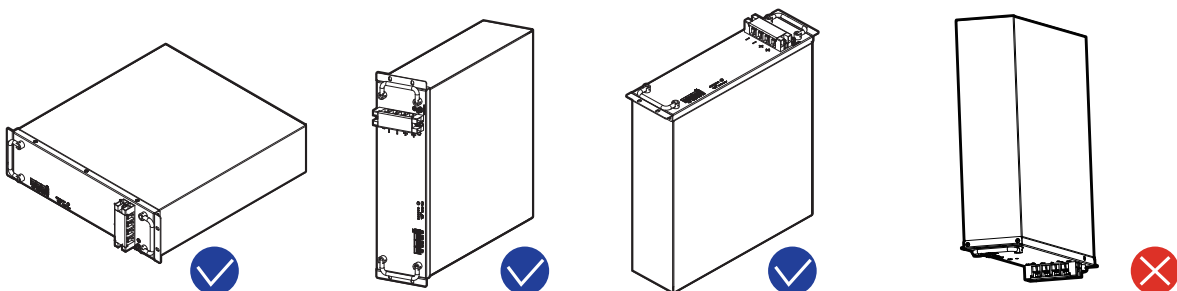


2 - Stackable Installation With Bracket Support

CAUTION !

Before installing battery, remove conductive ornaments such as watch, bracelet and rings and wear protection equipment. Check and confirm the battery is powered off and battery breakers are turned off before any process.



Step 1

Prepare support brackets.



Step 2


Set the battery into 2 pcs of brackets from the rear.

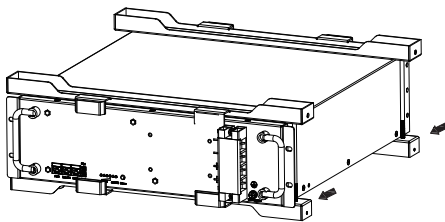


Step 3

Stack battery packs with brackets and fasten screws.

At most 8 battery packs can be stacked in this way.

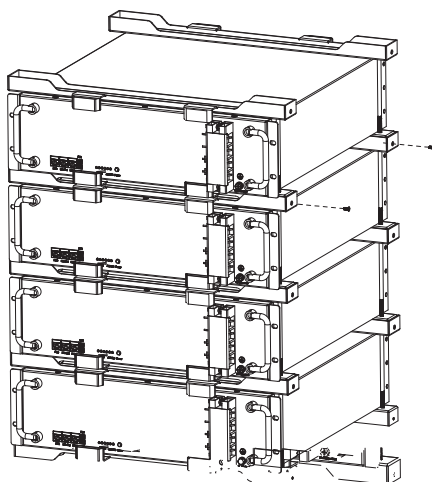


Max. 8 PACKs

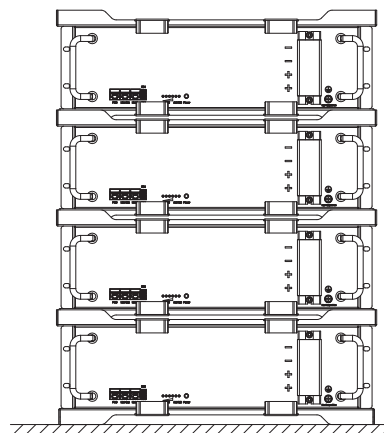


For more information regarding battery installation please download our pdf [HERE](#).

Hope 4.8L-C1 Kit package

Item NO	Item Number	Qty
5	Battery Bracket	4 pcs
6	Screw bolt	4 pcs
7	RNB-22-6 lug	4 pcs
8	Screw	4 pcs
9	Power+ Cable	1 pcs
10	Power- Cable	1 pcs
11	Network Cable A	1 pcs
12	Network Cable B	1 pcs



5



6



7




8



9



10



11



12

Introduction


MC4 connectors are commonly used for connecting solar panels. It is a standard connector that enables the easy construction of strings of panels and is a staple in the renewable energy sector.

Product Options



DESCRIPTION	PART NO.
Module Type	KMSW450M-144
Type	PV004
Rated Voltage	1000V DC
Rated Current	30A
Standard	ICE 62852
Protection Degree	IP67
Contact Resistance	≤ 0.5 mΩ
Pollution degree	2
Ambient Temperature	40°C~+85°C
Cable Cross Section Area	2.5mm ² .4mm ² .6mm ²
Insulation Material	PC EXL9330
Flame Class	UL94 V.0

Product Features

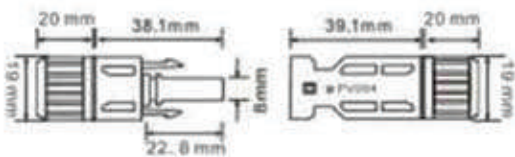

The MC4 system consists of a plug and socket design, a male and female connector.

More Information

Solar panels are a clean source of energy that use the sun’s rays to convert them into electricity or heat.

Our clean energy solutions provide electrical power as a way to decarbonize and transition to clean energy in our mission to combat climate change.



Kingsmill Industries (UK) Ltd

Unit 4, Plymouth Avenue
Pinxton, Derbyshire, NG16 6NS
United Kingdom

Tel: +44 (0)1773 510001 | **Fax:** +44 (0)1773 417850

www.kingsmillearthing.co.uk

Email: sales@kingsmillearthing.co.uk